


Fiber Optic Distribution Systems

34 TERMINATION PANEL (Outdoor Wall Mount)



OTP-8

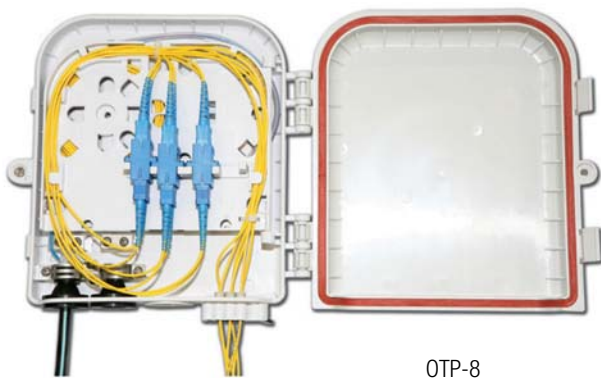

OTP-16



Specifications

ITEM	OTP-8	OTP-16
Dimensions	L:181mm, W:207mm, H:45mm	L:225mm, W:302mm, H:71mm
Weight	0.9Kg	1.3Kg
Cable input capacity	Max 2ports (Max. dia:12mm)	Max 2ports (Max. dia:12mm)
Cable output capacity	Max 8 Ports (Max. dia:3mm)	Max 16 Ports (Max. dia:3mm)
Max. capacity	8core	16core
Operation Temperature	-40 °C~+85 °C	-40 °C ~+85 °C
Tensile Strength	≥450Kg/cm ²	≥450Kg/cm ²
Impact Strength	35Kg cm/cm (nomar temp.),	35Kg cm/cm (nomar temp.),
	10Kg cm/cm (-30 °C)	10Kg cm/cm (-30 °C)
Flexural Strength	≥450Kg/cm ²	≥450Kg/cm ²

Ordering Information

RNOTP



①

②

① Fiber count

② Adaptor type

1C ~ 16C

SC