


▷ **Transformer - Power Transformer**

- *Phase - 3φ
- Frequency : 60Hz , 50Hz
- Primary voltage : 22.9kV
- Secondary voltage : 6.6/3.3kV
- TAP Voltage : 23.9 - R22.9 - 21.9 - 20.9 - 19.9kV
- Vector : Dd0, Dyn11.etc

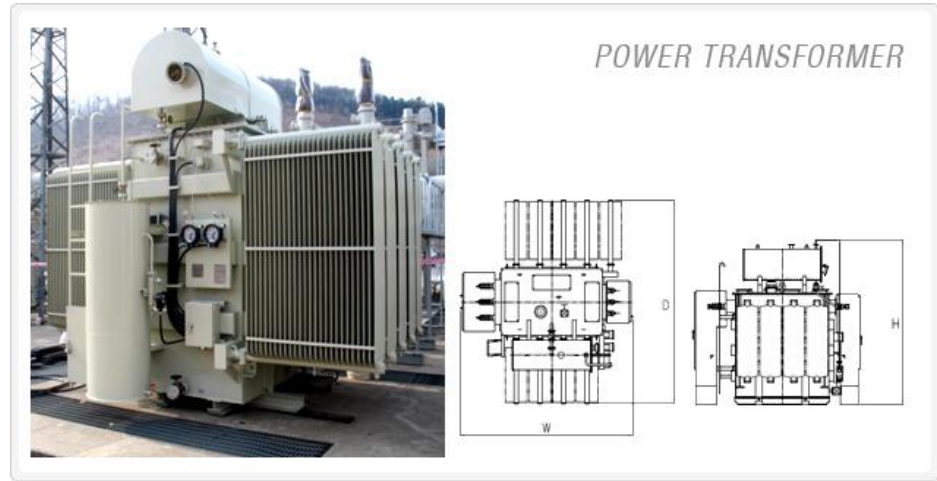

CAPACITY (KVA)	Exciting Current I ₀ (%)	Voltage Req. ε(%)	Eff n(%)	Dimension(mm)			Oil (ℓ)	Total Weight (kg)
				W	D	H		
1000	4.5	1.3	98.4	2200	1950	1700	900	3500
1500	4.5	1.25	98.5	2600	2100	2600	1480	4800
2000	4.5	1.2	98.5	2900	2200	2800	1700	6200
2500	4	1.2	98.7	3100	2500	2900	2000	7300
3000	4	1.2	98.7	3100	2600	3050	2200	8000
5000	4	1.1	98.9	3200	3000	3100	3200	12000
7500	3.5	1	99.1	3400	3400	3300	4000	14500
10000	3.5	1	99.2	3600	3800	4000	5500	16500
12000	3	1.2	99	4250	3840	3830	5600	26500
14000	2.5	1.1	99.1	4300	3900	4070	7300	29000